

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:

Order:


Project:

Requirements:

By:

Date:

Specifications				
Application	Inlet Pressure	Reduced Pressure	Maximum Temperature	Minimum Differential
Steam	15-250 psig [1-17 bar]	3-15 psig [0.2-1 bar]	410 °F [210 °C]	7 psig [0.5 bar]
Air		7-60 psig [0.5-4 bar]		
Non-Corrosive Gases		50-140 psig [3-10 bar]		

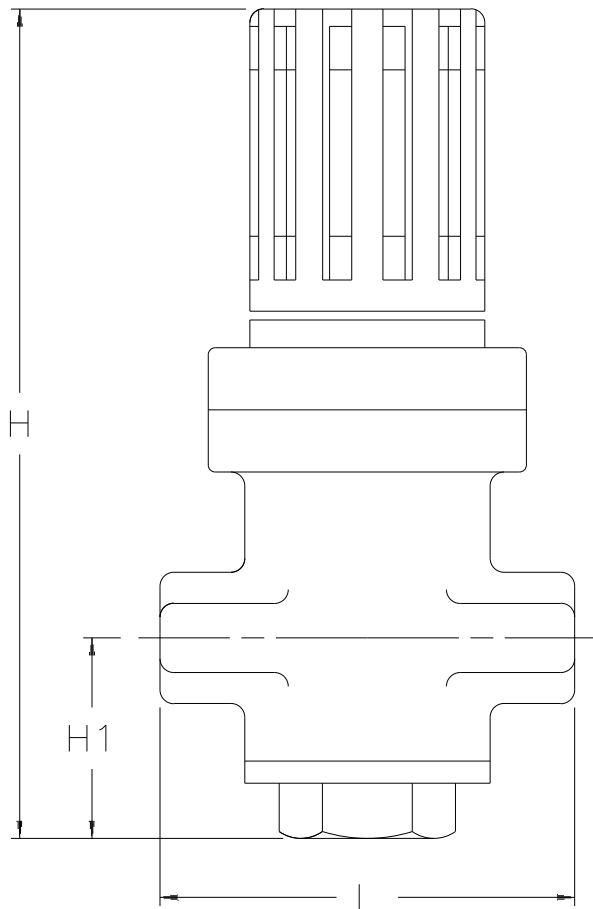

Dimensions					
SIZE	L	H	H1	Cv [Kv]	Weight
1/2" [15]	3-1/8" [80mm]	7-1/2" [191mm]	2" [47mm]	1.3 [1.1]	4-1/4 lbs [1.9 kgs]
3/4" [20]	3-3/8" [85mm]	7-1/2" [191mm]	2" [47mm]	1.5 [1.3]	4-1/4 lbs [1.9 kgs]
1" [25]	3-3/4" [95mm]	7-1/2" [191mm]	2" [47mm]	2.5 [2.2]	4-1/2 lbs [2 kgs]
1-1/2" [40]	5-1/2" [140mm]	12-1/8" [307mm]	3" [77mm]	5.6 [4.8]	21-3/8 lbs [9.7 kgs]
2" [50]	5-7/8" [150mm]	12-1/8" [307mm]	3" [77mm]	8.5 [7.4]	22 lbs [10 kgs]

NOTE:

1) Also available with BSPT threads. Consult Factory.

Materials	
Body	Cast Bronze ASTM B584
Valve	Hardened Stn. Stl. AISI 440
Seat	Hardened Stn. Stl. AISI 440
Bellows	Phosphor Bronze ASTM B103


 Armstrong Pressure/Temperature Group
 221 Armstrong Blvd.,
 Three Rivers, MI. 49093
Armstrong (269) 279-3600 Fax(269) 273-8656
 Posted on www.armstronginternational.com

Product	CDY No.	Date
GD-30	1038	05/18/2011
		Rev. D